


Quality products

ISOHEAT[®]

Capillary pipe - double thermostat

series MiL-CSTL

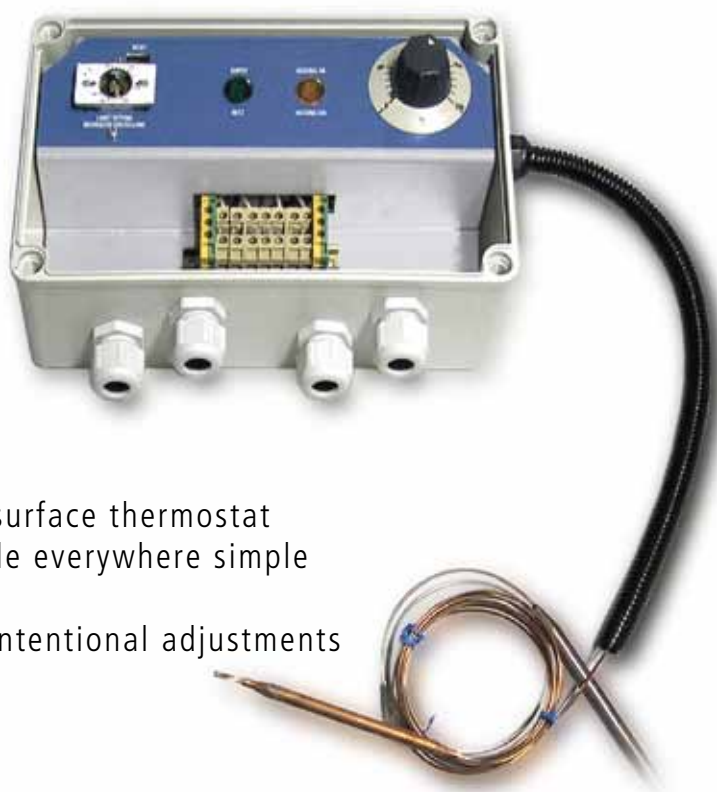

Description:

The particularly robust electromechanical surface thermostat with additional security limiter is applicable everywhere simple continual product temperature is required. The transparent cover protects against unintentional adjustments of the temperature settings.

Features:

- stable polycarbonate housing with clear cover
- indicator lamps for mains and operation
- temperature setting visible from outside
- direct connection from mains and heating possible
- switched power up to 16 A
- fastening screw 4 x M20
- length capillary pipe regulator ca. 2 m
- length capillary pipe limiter ca. 1m

Technical data

MiL-CSTL

nominal voltage	230 V AC
switch power	3650 W
switch current	16 A
temperature range	see order data
length capillary pipe regulator	ca. 2 m
length capillary pipe limiter	ca. 1 m
material capillary pipe regulator	CU
material capillary pipe limiter	VA 1.4571
switch difference regulator	2,5 %
switch difference limiter	5 %
protection class	I
protection type	IP 65
fastening screw	4 x M20
dimensions	230 x 140 x 100 mm (w x h x d)

Order data

type	temperature range regulator	temperature range limiter	order-no.
MiL-CSTL200	0 - 200°C	20 - 500°C	60001200
MiL-CSTL300	50 - 300°C	20 - 500°C	60001300

Other temperature regulators or capillary pipe - thermostats on request.



Electronic temperature regulator MiL-EC200



Electronic temperature regulator series MiL-RD1000



Electronic temperature regulator series MiL-RD1053



Regulator- and limiter combination MiL-RD3000

MiL Heating Systems
Großer Sand 4
D-76698 Ubstadt-Weiher

Phone + 49 (0) 72 51 - 93247 - 0
Fax + 49 (0) 72 51 - 93247 - 29

E-Mail: info@isoheat.de
Internet: www.isoheat.de