

Quality products

ISOHEAT[®]

Parallel-heating tape

series MiL-PHT

for surface temperatures up to 150°C




Features:

- constant power each meter
- processing of the role
- cut any size
- easy self assembling
- wide rang of using, because high chemical resistance of insulation and outside surface in Teflon FEP.

Applications:

frost protection, heating of pipe conductors, containers, valves, pumps, etc.

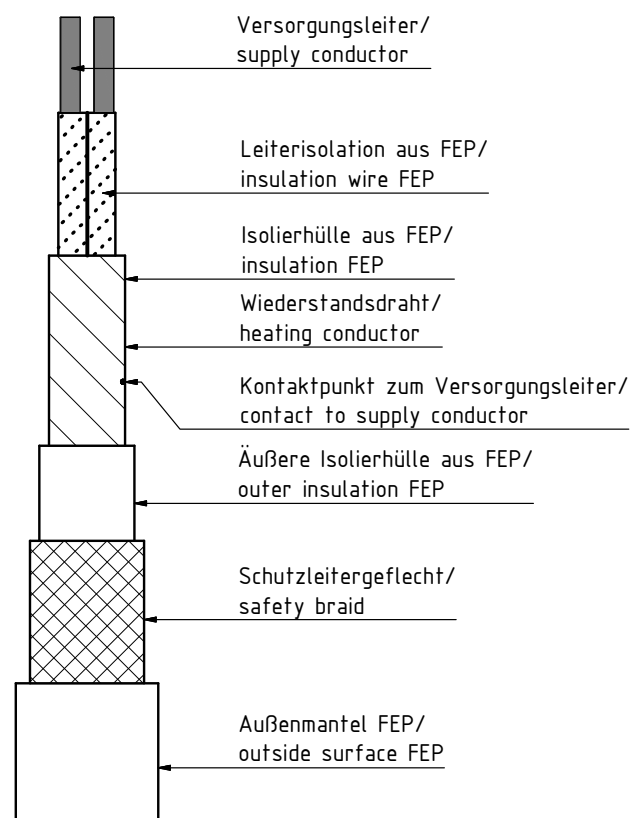

Technical data / order data

MiL-PHT

type		MiL-PHT10	MiL-PHT20	MiL-PHT30
nominal voltage	V	220 - 240	220 - 240	220 - 240
power at 220 V	W/m	10	20	30
power at 240 V	W/m	12	24	36
max. permissible heating tape temperature	switched on °C	150	150	150
	switched off °C	200	200	200
min. inlay temperature		-40	-40	-40
max. heating circle lengths	m	120	90	75
protection type		I	I	I
protection class		IP 65	IP 65	IP 65
min. bending radius	mm	> 25	> 25	> 25
dimensions	mm	8 x 6	8 x 6	8 x 6

order-no.		10000010	10000020	10000030
-----------	--	----------	----------	----------

Note

The heat conductor is spirally wrapped around the power wires and contact each other at a distance of 1m. Please make sure, that assembling is after the last point of contact, so only short overhang is unheated. But at beginning of heating tape the overhang can be used as cold end.

Accessories

heating tape connector	type MiL-PHT-A1	order-no. 100000001
connection kit	type MiL-PHT-V1	order-no. 100000002

Terminal boxes, matching assembly consoles and assembly materials upon request.

For temperature regulation we suggest our program of electronic control and temperature regulation appliances and corresponding temperature sensors.



Electronic temperature
regulator MiL-EC200



Electronic temperature
regulator series
MiL-RD1000



Regulator- and limiter
combination MiL-RD3000



Temperature sensors

MiL Heating Systems
Großer Sand 4
D-76698 Ubstadt-Weiher

Phone + 49 (0) 72 51 - 93247 - 0
Fax + 49 (0) 72 51 - 93247 - 29

E-Mail: info@isoheat.de
Internet: www.isoheat.de