

Quality products

ISOHEAT[®]

Connection boxes



MiL-PCB0	material: fiberglass polyester
Connection box	protection system: IP 65
usable for 1 mineral insulated heating cable or 1 heating tape	colour: grey RAL7000
	temperature range: -40°C - +100°C
	bore holes: 2 x M 20 x 1,5
	glands: 1 x M 25
technical data:	complimentary parts:
dimensions: 125 x 80 x 65 mm	2 x 10 mm ² Uk10
(w x h x d)	1 x 10 mm ² USLKG10
order-no.: 70000000	




MiL-PCB1	material: fiberglass polyester
Connection box	protection system: IP 65
usable for 2 mineral insulated heating cable or 2 heating tapes	colour: grey RAL7000
	temperature range: -40°C - +100°C
	bore holes: 4 x M 20 x 1,5
	glands: 1 x M 25
technical data:	complimentary parts:
dimensions: 122 x 120 x 90 mm	4 x 10 mm ² Uk10
(w x h x d)	2 x 10 mm ² USLKG10
order-no.: 70000001	blanking plug: 3 x M 20 loose





<p>MiL-PCB2</p> <p>Connection box usable for 3 mineral insulated heating cable or 3 heating tapes</p> <p>technical data: dimensions: 220 x 120 x 90 mm (w x h x d)</p> <p>order-no.: 70000002</p>	<p>material: fiberglass polyester</p> <p>protection system: IP 65</p> <p>colour: grey RAL7000</p> <p>temperature range: - 40°C - +100°C</p> <p>bore holes: 6 x M 20 x 1,5</p> <p>glands: 1 x M 25</p> <p>complimentary parts: 6 x 10 mm² Uk10 3 x 10 mm² USLKG10</p> <p>blanking plug: 2 x M 20 loose</p>
--	---

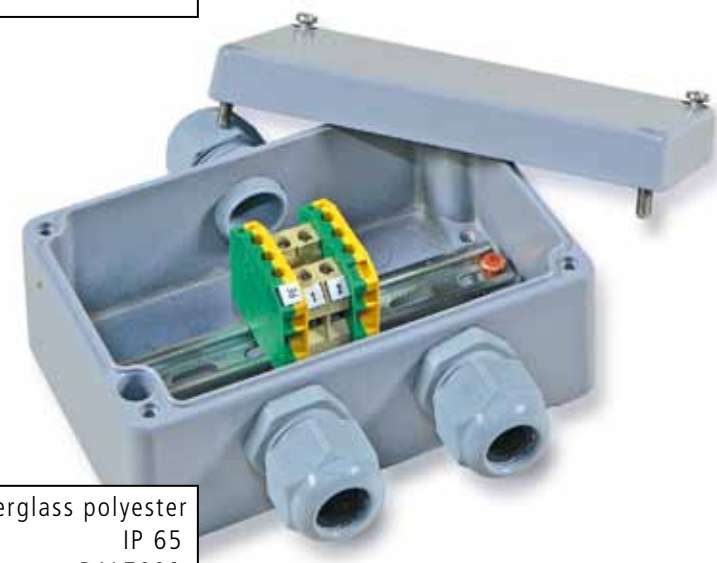

<p>MiL-PCB5</p> <p>Connection box usable for 1 mineral insulated heating cable or 1 heating tape</p> <p>technical data: dimensions: 95 x 95 x 57 mm (w x h x d)</p> <p>order-no.: 70000005</p>	<p>material: fiberglass polyester</p> <p>protection system: IP 65</p> <p>colour: grey RAL7000</p> <p>temperature range: - 40°C - +100°C</p> <p>bore holes: 2 x M 20 x 1,5</p> <p>glands: 1 x M 25</p> <p>complimentary parts: 2 x 10 mm² Uk10 1 x 10 mm² USLKG10</p>
---	--

MiL Heating Systems
Großer Sand 4
D-76698 Ubstadt-Weiher

Phone + 49 (0) 72 51 - 93247 - 0
Fax + 49 (0) 72 51 - 93247 - 29

E-Mail: info@isoheat.de
Internet: www.isoheat.de